


3528 LED Tape Light

3528 Series

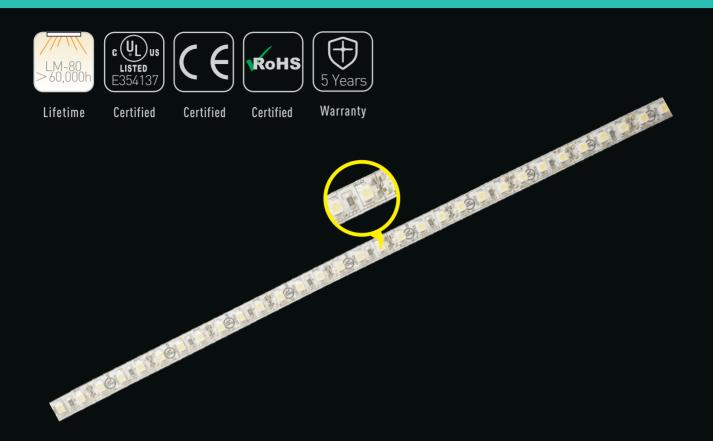

Ra Available

IP Grade Available





Features

- Indoor (IP22) are available Epistar chips, LM80 tested
- Ra90, with high R9 & R13 value
- Cuttable every 3 LEDs for 12V,6 LEDs for 24V
- 3M double sided tape for easy installation
- cULus Listed, 5 years warranty

BLUEVIEW ELEC-OPTIC TECH CO.,LTD



3528 LED Tape Light

3528 Series

Specifications

LED Type	SMD 3528	Dimmable	Yes (compatible with BV311 RF dimmer & BV Dimmer)
LED Q'ty/m	120pcs	IP grade	IP22
Input Voltage	12V / 24VDC Constant Voltage	Installation	3M [™] double sided tape
Power	9.6W	Working Temperature	-25~+60 ℃
Cutting length	12V 25mm 3 LEDs 24V 50mm 6 LEDs	Max run	12V 3 meters 24V 6 meters
Strip Width	8mm	Certification	E354137 cULus Listed, CE, RoHs
Viewing Angle	120°	Warranty	5 years ^①


Order Code	CCT/ Color	CRI	Lumen/M ²
FN-3528A-120-12-27K	2645-2800K	90	624
FN-3528A-120-12-30K	2850-3025K	90	624
FN-3528A-120-12-35K	3270-3545K	90	672
FN-3528A-120-12-65K	6260-6680K	90	768

Note[®]: Contact Blueview for exact warranty period and policy

Note $\stackrel{\circ}{:}$ Lumen output are based on CRI80+ measured according to PMS-80, with a tolerance of +/- 5%

Note®: Standard package: 5m/roll

Order Code




BLUEVIEW ELEC-OPTIC TECH CO.,LTD



3528 LED Tape Light


3528 Series

Dimension

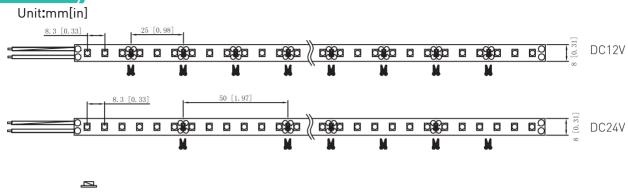

IP22

Package

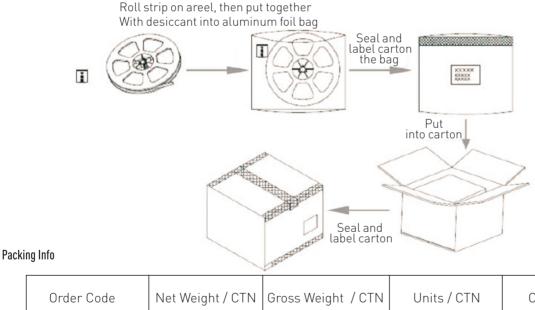

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
FN-3528A-120	7.76 (1±10%) kgs	13.06 (1±10%) kgs	100 rolls	550*400*340mm

Remark: Data to change according to reality without prior notice.