


360°
BENDING
LED NEON FLEX


NCR19



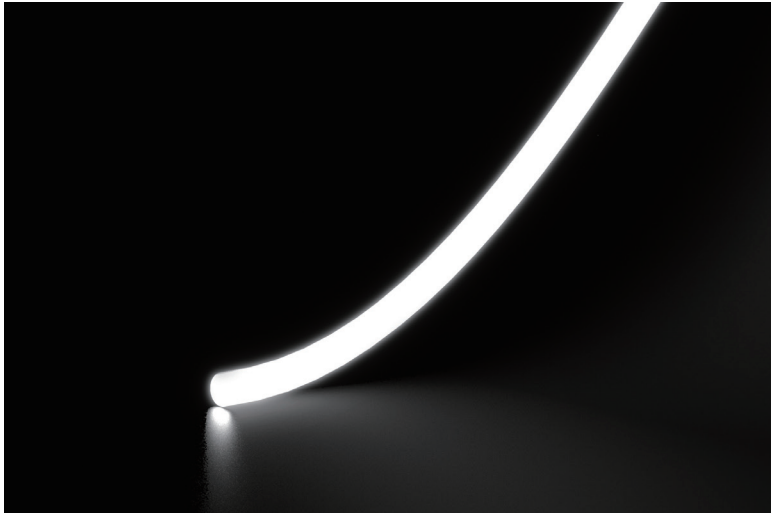

Features

- Color options: Single color.
- Design: Superior design with exquisite craftsmanship ensure stable and reliable performance.
- Flexibility: 360 bending, min. bend diameter 120mm [4.72inch].
- IP grade: Silicone extrusion, IP65 protection.
- Warranty: 5 years indoor, 3 years outdoor.
- Customization: multiple spec options, can be customized upon requirements.

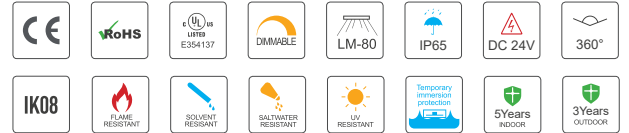

Optical & Electrical Parameters

Model No.	NCR19					
CCT/Wavelength (K/nm)	2400K	2700K	3000K	4000K	5000K	6500K
Beam Angle (°)	360	360	360	360	360	360
Luminous Flux (lm/m)	1029	1198	1267	1348	1301	1207
CRI	70+	70+	70+	70+	70+	70+
Efficacy (lm/W)	63.6	75.7	78.6	84.1	79.8	74.8
Voltage (V DC)	24	24	24	24	24	24
Measured Power (W/m)	16.0±10%	16.0±10%	16.0±10%	16.0±10%	16.0±10%	16.0±10%

Model No.	NCR19				
CCT/Wavelength (K/nm)	Red	Green	Blue	Yellow	Orange
Beam Angle (°)	360	360	360	360	360
Luminous Flux (lm/m)	387	960	241	143	322
CRI	--	--	--	--	--
Efficacy (lm/W)	24.2	60.0	15.1	8.9	20.1
Voltage (V DC)	24	24	24	24	24
Measured Power (W/m)	16.0±10%	16.0±10%	16.0±10%	16.0±10%	16.0±10%

Other Parameters


Model No.	NCR19
LED QTY (pcs/m)	336
Product Size L*W*H(mm)	5000*19*19
Standard Run Length(mm)	5000
Min. Cuttable Length(mm)	35.71
Working Temperature	-20~+60°C
Storage Temperature	-20~+70°C

Note:


The given data is typical values. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

Profile Drawings


Unit:mm[inch]

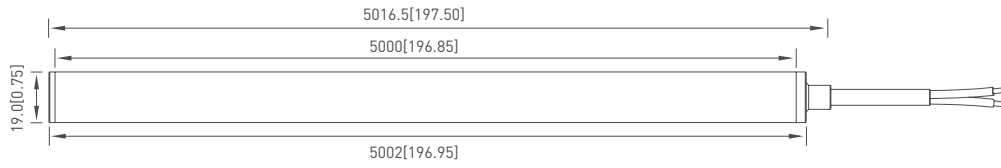


Bend direction



Bending Diameter




Sectional view




Front cap

Glue Process (IP67)



Closing End-cap


Glue Process (IP67)



Remarks: "L" is the standard size of the light strip, can be customized according to the multiple of the minimum cutting unit length.

IP Process Technology

Injection Moulded (IP65)

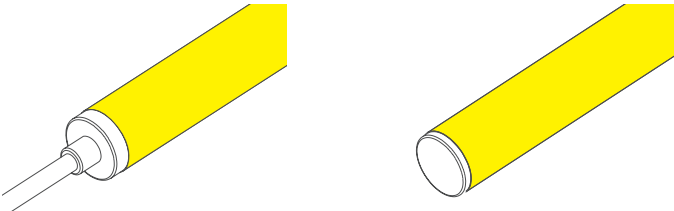

- After cutting, the IP protection of both glue processed and injection moulded product will drop to IP65, for injection moulded product, if customer self-processed injection moulded end cap for the cutted end, the IP protection will keep the IP65 level.
- Injection moulded end cap self-processing, need to prepare corresponding mold and molding equipment.
- If the customer reprocesses Blueview injection moulded end cap, and the waterproof of the molded end does not meet Blueview standard, the potential troubles are not covered by the warranty.


Product accessories



PCIS (front)



ECS (end)




Cable




Clips


Installation method




Pendant Rope and ribbon set




Pendant Rope and hook set




Pendant Pole and hook set



Pendant PC groove set




Ceiling PC groove set



Round splice set

Luminous Intensity Distribution Diagram

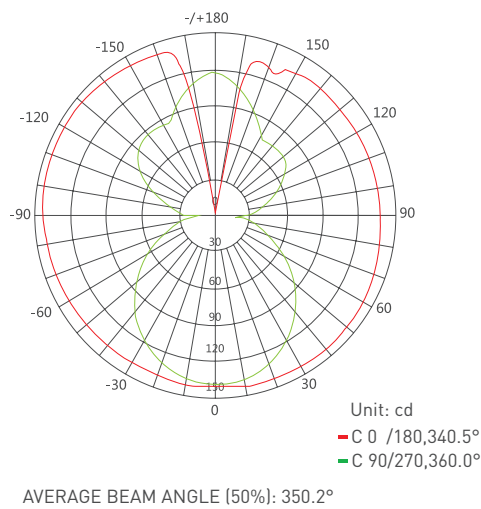

Average Illumination

Flux Out: 208.5lm (CCT=6500K)

Height	Eavg, Emax	Beam Angle: 90.00°	Diameter
0.5m	265.5,508.9lx		100cm
1.0m	66.4,127.2lx		200cm
1.5m	29.5,56.6lx		300cm
2.0m	16.6,31.8lx		400cm
2.5m	10.6,20.4lx		500cm
3.0m	7.38,14.1lx		600cm
3.5m	5.42,10.4lx		700cm
4.0m	4.15,7.95lx		800cm
4.5m	3.28,6.28lx		900cm
5.0m	2.66,5.09lx		1000cm

Note: for other data, please consult sales rep.

Packaging information

Model No.	NCR19
Product Size L*W*H (mm)	5000*19*19
Carton Size (mm)	480*445*370
Meter/Reel	5
Reel/Carton	6
Net Weight (kg)	10.5 (1± 10%)
Gross Weight (kg)	12.05 (1± 10%)

Note: The gross weights of all above model are less than volume weight, the volume weight is 15.81kg

Recommended power supply upon working length

Model No.	NCR19	
Working Length(m)	1	5
Rated Current (A)	0.56±0.17	2.8±0.84
Rated Voltage (DC V)	24	24
Rated Power(W)	16	80
Recommended Power Supply(W)	25	100
Power Supply Mode	Single Feed	Single Feed

BLUEVIEW ELEC-OPTIC TECH CO.,LTD
Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
Mail: sales@blueviewled.com
Web.: www.blueviewled.com
Add.: No.1000, Konggang 2nd Konggang Road, Southwest Aviation
Industrial Zone, Chengdu, China. 610207