

Features

- High performance 9V 3030 LEDs
- Secondary optic lens for high uniformity
- Aluminum PCB for excellent heat dissipation
- SM-2A connecting piece for easy connection
- Custom specifications for wide choices

Application

Lightbox with depth of 4-18cm

Installation

Location with double-sided adhesive tape and then fix with screws.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
Mail: sales@blueviewled.com Web.: www.blueviewled.com
Add: No.1000, Section 2, 2nd Konggang Road, Southwest
Aviation Industrial Development Zone, Chengdu, Sichuan, China.
Zip code: 610207

Specifications are subject to change without notice.
©Blueview™ 2018- All rights reserved. Made in China.

Specifications

Model No.	YD3-A-4806	YD3-A-9612
Color Temperature (K)	7836-9000	
Product Size	480*20*7.3mm	960*20*7.3mm
Beam Angle	170°	
Luminous Flux(Lm/pcs)	648	1296
Efficacy(Lm/W)	90	
Voltage(V)	12	
LED Quantity(pcs)	6	12
Power(W/pcs)	7.2	14.4
Ra	80	
Max Run (pcs)	8	4
Working Temperature	-25~+60°C	
Storage Temperature	-25~+70°C	

NOTE:


Test temperature is 25±2°C

The above data is typical values. The actual data of each single product may differ from the typical values. The data is subject to change without notice.

Different color temperature will make luminous flux different.

Profile Drawings

Unit:mm[in]

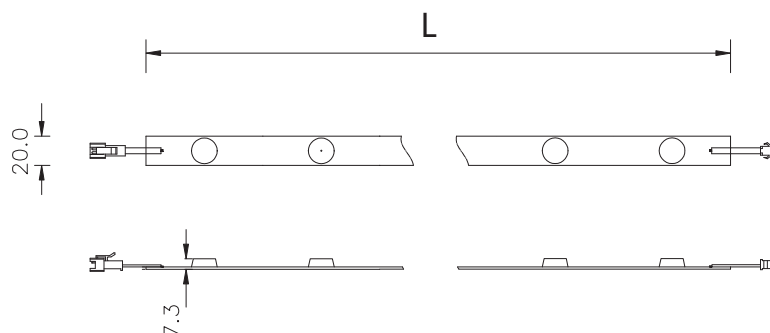


BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web.: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu, Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2018– All rights reserved. Made in China.

Luminous Intensity Distribution Diagram

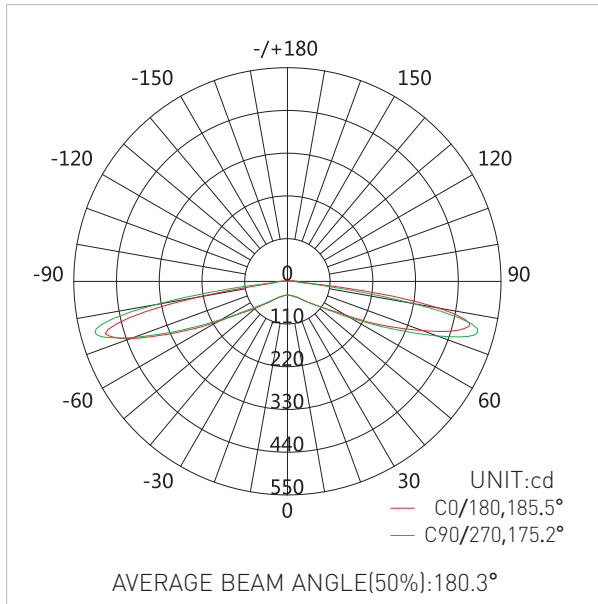


Note: The test sample is YD3-A-9612

Average Illumination


Flux out:1130lm

Height	Eavg, Emax	Angle:175.16°	Diameter
1cm	4388, 35483lx		47.29cm
2cm	1097,88708lx		94.59cm
3cm	487.5,39426lx		141.88cm
4cm	274.2,22177lx		189.18cm
5cm	175.5,14193lx		236.47cm
6cm	121.9,9856lx		283.77cm
7cm	89.54,7241lx		331.06cm
8cm	68.56,5544lx		378.35cm
9cm	54.17,4381lx		425.65cm
10cm	43.88,3548lx		472.94cm


Packaging




1. Two trays for length below one meter
Three trays for length above one meter




2. Put the product into the trays



3. Put the trays into carton case layer by layer,
and then put into accessory bags.



4. Seal and label it.



5. Use packing belt to pack. Add edge
protectors if necessary.

Packaging Information:

Packing material: Pearl cotton and carton box

Model No.	Product Size (mm)	Shipping Dimension (mm)	Quantity (pcs)	Net Weight (kg)	Gross Weight (kg)
YD3-A-4806	480*20*7.3	685*295*275	250	14.5(1±10%)	16.2(1±10%)
YD3-A-9612	960*20*7.3	1175*295*200	180	16.5(1±10%)	18.2(1±10%)

Two trays for length below one meter; three trays for length above one meter.

Note: The above quantity and weight are only for the illustrated packaging method. There will be differences in the quantity and weight with other packaging methods.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com Web: www.blueviewled.com
 Add: No.1000, Section 2, 2nd Konggang Road, Southwest
 Aviation Industrial Development Zone, Chengdu, Sichuan, China.
 Zip code: 610207

Specifications are subject to change without notice.
 ©Blueview™ 2018– All rights reserved. Made in China.