

## Features

- High efficacy 9V 3030 SMD
- Secondary lens design for uniform light
- Aluminium PCB for excellent heat dissipation
- Curtain style for simple mounting
- Available in 4 specifications
- 3 years warranty

## Application

5cm-12cm light box

## Installation

Locate with double-sided foam tape, and then fix by screws.

### **BLUEVIEW ELEC-OPTIC TECH CO.,LTD**

Tel: +86-28-8148 0011      Fax: +86-28-8148 1258  
Mail: sales@blueviewled.com      Web.: www.blueviewled.com  
Add: No.1000, Section 2, 2nd Konggang Road, Southwest  
Aviation Industrial Development Zone, Chengdu, Sichuan, China.  
Zip code: 610207

Specifications are subject to change without notice.  
©Blueview™ 2018- All rights reserved. Made in China.

## Specifications

<b>Model No.</b>	JYD3-A-9012	JYD3-A-5808	JYD3-A-4206	JYD3-A-2604
<b>Color Temperature (K)</b>	7800-9000			
<b>Light Color</b>	White			
<b>Beam Angle</b>	170°			
<b>Luminous Flux(Lm/pcs)</b>	1224	816	612	408
<b>Efficacy(Lm/W)</b>	85			
<b>Voltage(V)</b>	24			
<b>Max Run(pcs)</b>	10			
<b>Power (W/Piece)</b>	14.4	9.6	7.2	4.8
<b>Ra</b>	80			
<b>Ingress Protection</b>	IP60			
<b>Working Temperature</b>	-40~+60°C			
<b>Storage Temperature</b>	-40~+60°C			

Testing temperature: 25±2

The above data is typical values. The actual data of each single product may differ from the typical values.


The data is subject to change without notice.

Luminous flux is tested when lighting on with a single color.

Different color temperature will make luminous flux different.

## Profile Drawings

Unit:mm[in]

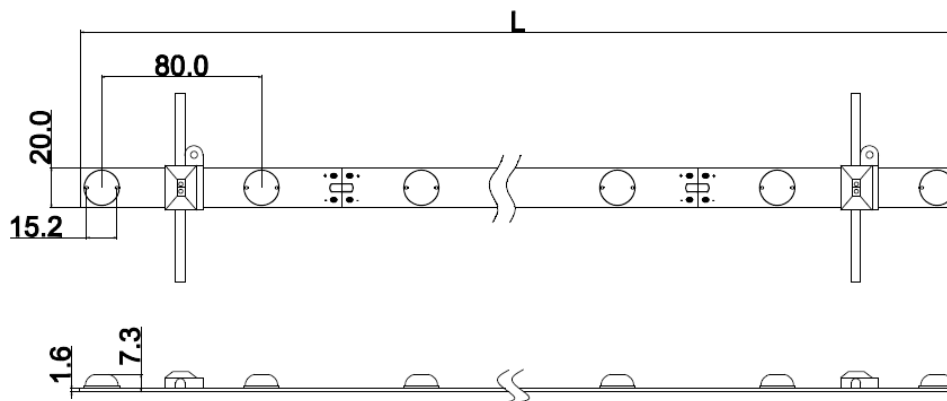

Model No	"L" mm[inch]	"W" mm[inch]	H mm[inch]	LED LED Quantity (pcs)
JYD3-A-9012	900[35.43]	20[0.79]	7.3[0.29]	12
JYD3-A-5808	580[22.83]	20[0.79]	7.3[0.29]	8
JYD3-A-4206	420[16.53]	20[0.79]	7.3[0.29]	6
JYD3-A-2604	260[10.23]	20[0.79]	7.3[0.29]	4