


### 3030 RGBW Non-waterproof Rigid Strip



### **Features**

- Input voltage: DC24V
- Osram LED, excellent performance and stability with great color mixing
- Connected with external controller for full-color effect
- 170° beam angle for more uniform light, ideal for slim lightbox
- Aluminum PCB with heat conductive adhesive on back for better heat dissipation

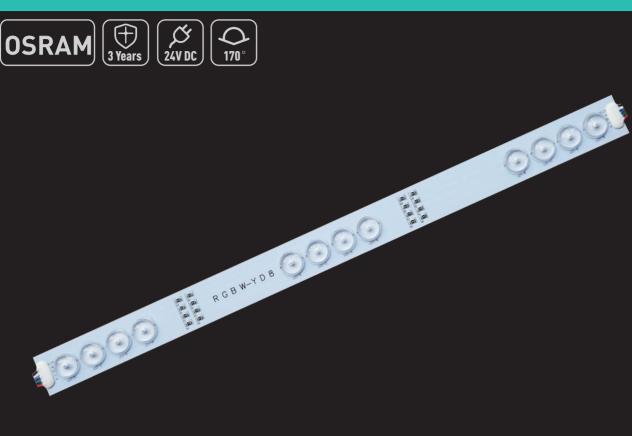

RGB lightbox

#### **BLUEVIEW ELEC-OPTIC TECH CO., LTD**

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258 Mail: sales@blueviewled.com Web.: www.blueviewled.com Add: No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Chengdu, Sichuan, China. Zip code: 610207



## 3030 RGBW Non-waterproof Rigid Strip



Fixed by screws

## **Specifications**

Part No.	RGBW-YD8					
Light color	Red	Green	Blue	White	RGBW	
Wave length/Color Temperature	R 620nm	G 540nm	B 450nm	W 6500K	24000K	
Beam Angle(°)	170°	170°	170°	170°	170°	
Luminous Flux(lm/pcs)	68	462	26	319	851	
RA	/	/	/	80	75	
Light Efficiency(lm/w)	19.2	121.0	6.8	88.1	58.5	
Voltage	24V DC	24V DC	24V DC	24V DC	24V DC	
Power(W/pcs)	3.5	3.8	3.8	3.6	14.5	
Standard Serial connection Qty (pcs)	8	8	8	8	8	
Max.Standard Serial connection Qty (pcs)	8	8	8	8	8	
<b>Operating Temperature</b> (°C)	-25~+60					
Storage Temperature(°C)	-25~+70					

Remark:

- The test temperature is  $25\pm2^{\circ}C$ ;
- Typical data as above, may some difference with reasonable fluctuation range.


#### **BLUEVIEW ELEC-OPTIC TECH CO., LTD**




### 3030 RGBW Non-waterproof Rigid Strip



Unit:mm[in]



## Luminous Intensity Distribution Diagram

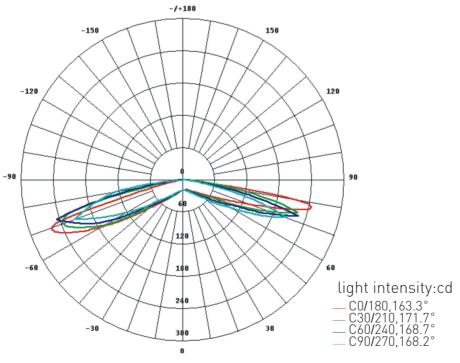

THE AVERAGE BEAM ANGLE(50%):168.0 DEG


#### **BLUEVIEW ELEC-OPTIC TECH CO., LTD**

Tel: +86-28-8148 0011Fax: +86-28-8148 1258Mail: sales@blueviewled.comWeb.: www.blueviewled.comAdd: No.1000, Section 2, 2nd Konggang Road, SouthwestAviation Industrial Development Zone, Chengdu, Sichuan, China.Zip code: 610207

Specifications are subject to change without notice. © Blueview™ 2016 – All rights reserved. Made in China.



## 3030 RGBW Non-waterproof Rigid Strip

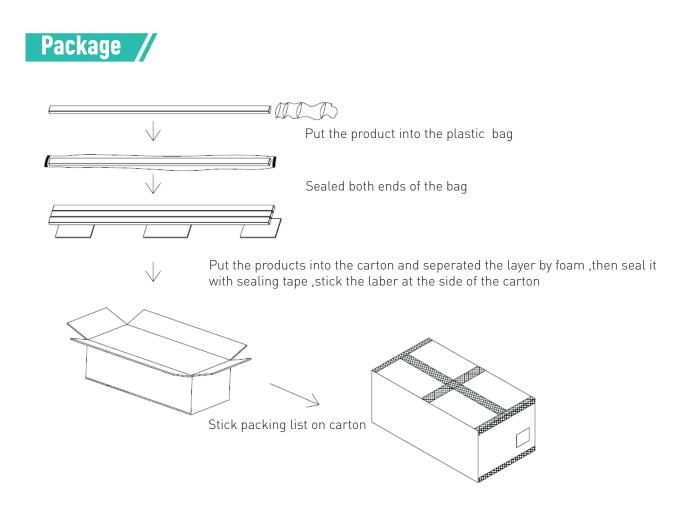

#### Packing details:

1.Packaged by PE transparent pocket, with normal export carton;

2.Packing size: 550\*400\*340mm;

3.

Part No.	Product size	Qty per carton	Net weight (NW/kg)	Gross weight (GW/kg)	
RGBW-YD8	450*30	117	14.5(1±10%)KG	15.8(1±10%)KG	

4. Above mentioned quantity and weight are based on above packing method only, quantity and weight differs when applying other packing, please refer to actual situation.